



# ND1070

## HF Neodymium Driver


- 109 dB SPL 1W / 1m average sensitivity
- 1 inch exit throat
- 44 mm (1 3/4 inch) edgewound aluminum voice coil
- 100 Watt program power handling
- Titanium dome over polyester suspension
- Proprietary phase plug design
- Neodymium magnetic structure
- Excellent thermal exchange



### GENERAL SPECIFICATIONS

Throat Diameter	25,4 mm (1 in)
Rated Impedance	8 Ohm
DC Resistance	5,3 Ohm
Minimum Impedance	7 Ohm at 4000Hz
le (at 1kHz)	67 µH
AES Power (1)	50 W above 1,6 kHz
Program Power (2)	100 W above 1,6 kHz
Sensitivity (3)	109 dB
Frequency Range	1600Hz - 20kHz
Recomm. Xover Frequency	1600Hz (12dB/oct slope)
Diaphragm Material	Titanium - Polyethylene
Voice Coil Diameter	44,4 mm (1 3/4 in)
Voice Coil Winding Material	Edge-wound aluminum
Magnet Material	Neodymium

### FREQUENCY RESPONSE CURVE

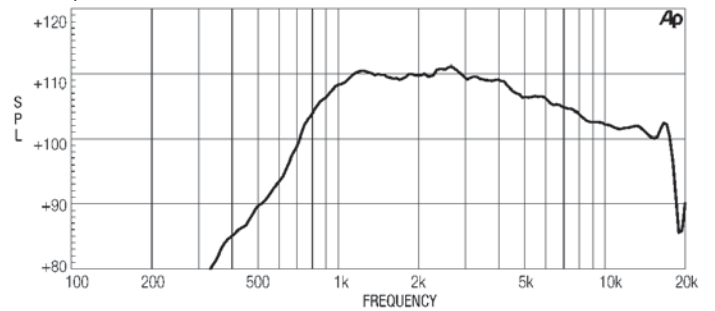


ND1070 MEASURED WITH 1W INPUT ON RATED IMPEDANCE AT 1M DISTANCE ON XT1086 HORN MOUTH AXIS

### MOUNTING INFORMATION

Overall diameter	98 mm (3,9 in)
N. of mounting holes and bolt	4 M6 holes 90° at Ø 76 mm (3 in)
Bolt circle diameter	76 mm (3 in)
Total depth	53 mm (2,1 in)
Net weight	1,1 Kg (2,4 lb)
Shipping weight	1,2 Kg (2,6 lb)
CardBoard Packaging dimensions	97x97x58 mm (3,8x3,8x2,3 in)

### FREE AIR IMPEDANCE MAGNITUDE CURVE

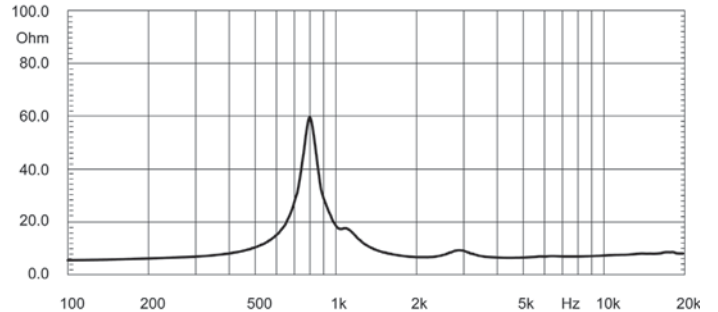

### NOTES

- 1) AES power rating is tested with a pink noise input having a 6 dB crest factor for two hours duration within the specified range. Power calculated on minimum impedance.
- 2) Program power rating is defined as 3 dB greater than AES rating, and is a conservative expression of the transducer ability to handle music program material.
- 3) Sensitivity is measured at 1W input on rated impedance at 1m on axis from the mouth of XT1086 horn averaged between 1kHz and 4kHz.