

12MB700

Very High Output MB Ferrite Transducer

101,5 dB SPL 1W / 1m sensitivity
 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
 450 W AES power handling
 Double Demodulating Rings (DDR) for lower distortion
 Improved heat dissipation via unique basket design
 Weather protected cone and plates for outdoor usage
 Ideal for compact two way and multiway systems



GENERAL SPECIFICATIONS

Nominal Diameter	300 mm (12 in)
Rated Impedance	8 Ohm
AES Power (1)	450 W
Program Power (2)	600 W
Peak Power	1200 W
Sensitivity (3)	101,5 dB
Frequency Range (4)	60 - 5000 Hz
Power Compression @-10dB	0,4 dB
Power Compression @-3dB	1,5 dB
Power Compression @Full Power	2,8 dB
Max Recomm. Frequency	4000 Hz
Recomm. Enclosure Volume	10 - 80 lt. (0,3 - 2,83 cuft)
Minimum Impedance	5,7 Ohm at 25°C
Max Peak To Peak Excursion	22 mm (0,87 in)


THIELE SMALL PARAMETERS (5)

Fs	49 Hz
Re	5 Ohm
Sd	0,0531 sq.mt. (82,31 sq.in.)
Qms	4,7
Qes	0,2
Qts	0,19
Vas	101 lt. (3,57 cuft)
Mms	41 gr. (0,09 lb) 101 lt. (3,57 cuft)
BL	17,8 Tm
Linear Mathematical Xmax (6)	± 4,5 mm (± 0,18 in)
le (1kHz)	0,9 mH
Ref. Efficiency 1W@1m (half space)	99,6 dB

MOUNTING INFORMATION


Overall diameter	315 mm (12,4 in)
N. of mounting holes and bolt	8
Mounting holes diameter	7,15 mm (0,28 in)
Bolt circle diameter	296 - 300 mm (11,65 - 11,8 in)
Front mount baffle cutout Ø	282 mm (11,1 in)
Rear mount baffle cutout Ø	282 mm (11,1 in)
Total depth	147,5 mm (5,82 in)
Flange and gasket thickness	16,5 mm (0,65 in)
Net weight	8,0 kg (17,66 lb)
Shipping weight	8,8 kg (19,43 lb)
CardBoard Packaging dimensions	332 x 332 x 184 mm (13,07 x 13,07 x 7,24 in)

FREQUENCY RESPONSE CURVE

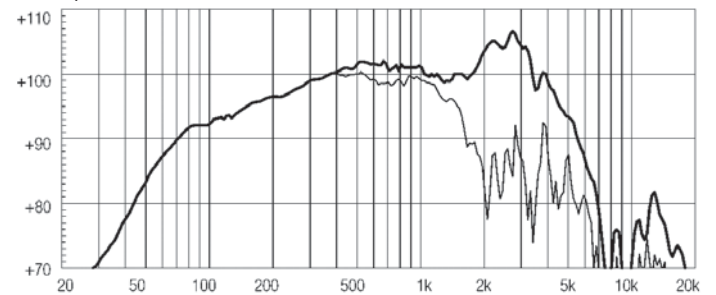

FREQUENCY RESPONSE CURVE OF 12MB700 MADE ON 50 LIT. ENCLOSURE TUNED 60HZ IN FREE FIELD (4PI) ENVIRONMENT. ENCLOSURE CLOSES THE REAR OF THE DRIVER. THE THIN LINE REPRESENTS 45 DEG. OFF AXIS FREQUENCY RESPONSE

FREE AIR IMPEDANCE MAGNITUDE CURVE

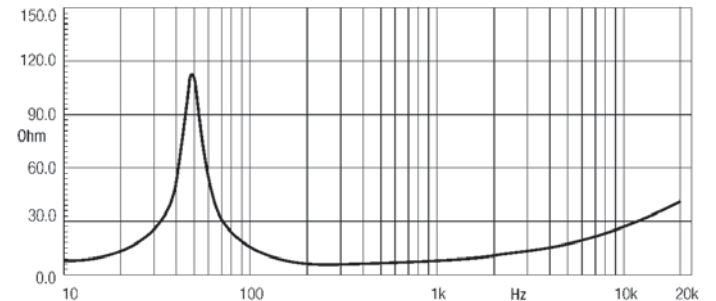

FREE AIR IMPEDANCE MAGNITUDE CURVE

NOTES

- (1) AES power is determined according to AES2-1984 (r2003) standard
- (2) Continuous power rating is measured in 50 lit enclosure tuned 60Hz using a 60 - 2000Hz band limited pink noise test signal with 50% duty cycle, applied for 2 hours.
- (3) Sensitivity represents the averaged value of acoustic output as measured on the forward central axis of cone, at distance 1m from the baffle panel, when connected to 2,83V sine wave test signal swept between 500Hz and 2500Hz with the test specimen mounted in the same enclosure as given for (1) above.
- (4) Frequency range is given as the band of frequencies delineated by the lower and upper limits where the output level drops by 10 dB below the rated sensitivity in half space environment.
- (5) Thiele - Small parameters are measured after the test specimen has been conditioned by 450 W AES power and represent the expected long term parameters after a short period of use.
- (6) Linear Math. Xmax is calculated as $(HvcHg)/2+Hg/4$ where Hvc is the coil depth and Hg is the gap depth.